

Permabond®


Adhesives for Battery Assembly

ISO 9001 Certified
"Our Science ... Your Success"


Permabond has a comprehensive portfolio of adhesives and sealants for use throughout conventional, hybrid, and electric vehicles. Our adhesives for battery assembly enhance the vehicle's performance by reducing weight, transferring heat, and reducing fire risks. Permabond specializes in custom formulations to meet battery manufacturers' requirements.

FEATURES & BENEFITS

- Weight reduction
- High level of thermal conductivity
- Absorb stress and vibration
- Electrical insulation
- Fire retardancy to UL94-V0
- Flexible, compressible products available
- Excellent environmental resistance & 100% seal against humidity
- Ability to bond and seal hard to bond materials such as polyethylene, polypropylene, PEEK, PBT, and PTFE
- Ability to custom formulate to suit requirements

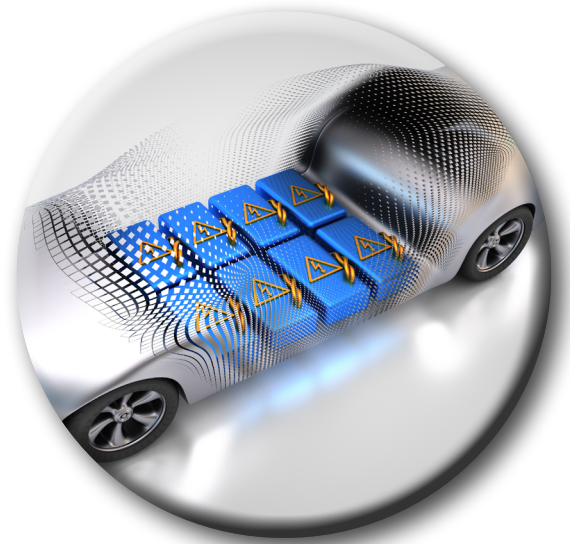


Featured Product Permabond Expanding Thermally Conductive Filler

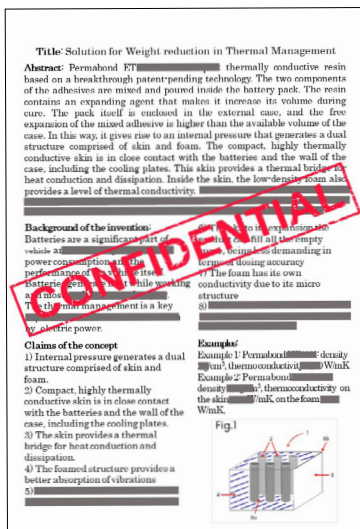

Patent Pending Technology

Thermal Management & Weight Reduction

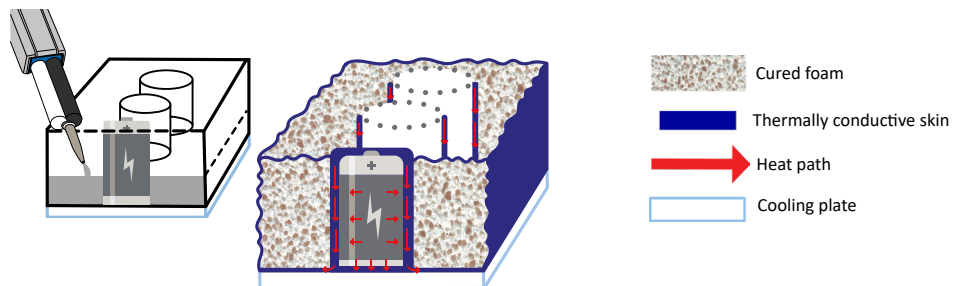

Permabond TC Filler expands during cure to form a lightweight foam surrounded by a highly thermally conductive skin.

Permabond TC Filler is a two component epoxy which is dispensed through a static mix nozzle to partially fill the battery pack. As it cures it forms a lightweight foam structure. The expansion causes the foam to compress at the edges to form a highly thermally conductive skin that efficiently transfers heat to the cooling plate.


Adhesives for Battery Assembly

PERMABOND ES5520

Single Part - Heat Cure Epoxy

Bonds Graphite Plates for Hydrogen Fuel Cells

Permabond graphite bonder is a single part epoxy adhesive that cures with heat to form strong bonds to graphite and other substrates.



PERMABOND ET5441

Two Part - Epoxy

Thermally Conductive - High Temperature Resistance

Permabond ET5441 is a thixotropic, grey, 2:1 mix ratio 2 part epoxy that forms strong bonds to metals.

- Excellent chemical resistance
- Temperature resistance 200°C (390°F)
- Shear strength on steel (ISO4587) 20 N/mm² (2900 psi)
- Thermal conductivity (ISO 8302) 1.1 W/(m.K)
- Specific gravity 2.1



PERMABOND MT3836

Two-Part - Hybrid Epoxy

Flexible/Compressible - Thermally Conductive - Fire Retardant

Permabond MT3836 is a two-part, modified hybrid silane polymer adhesive designed for sealing and bonding applications. It bonds metals and many plastics as well as a variety of different metals.

The cured adhesive has been designed to meet the fire retardancy requirements of UL94 V-0.

PERMABOND 825

Patented Cyanoacrylate Technology

High Temperature Resistant

Bonds Metals, Plastics, and more.

Permabond 825 is a clear, colorless, low viscosity (125 cP) adhesive. Permabond® 825 has excellent strength retention during thermal ageing and resists to 200°C (390°F). It forms strong bonds to most substrates. Shear strength on steel can exceed 2500 psi.

PERMABOND TA4611

Two-Part - Structural Acrylic


Battery Housing Bonder

Bonds PTFE, PP, PE, UHMW, etc.

Permabond TA4611 is a transparent adhesive that achieves handling strength in under an hour, forming exceptionally strong bonds to low surface energy plastics with no need for primer or surface treatment.

APPLICATIONS

- 1 Sealing/Gasketing
- 2 Potting
- 3 Board protection – conformal coating
- 4 Electrically conductive adhesives
- 5 Structural adhesives
- 6 & 7 Thermally conductive adhesives

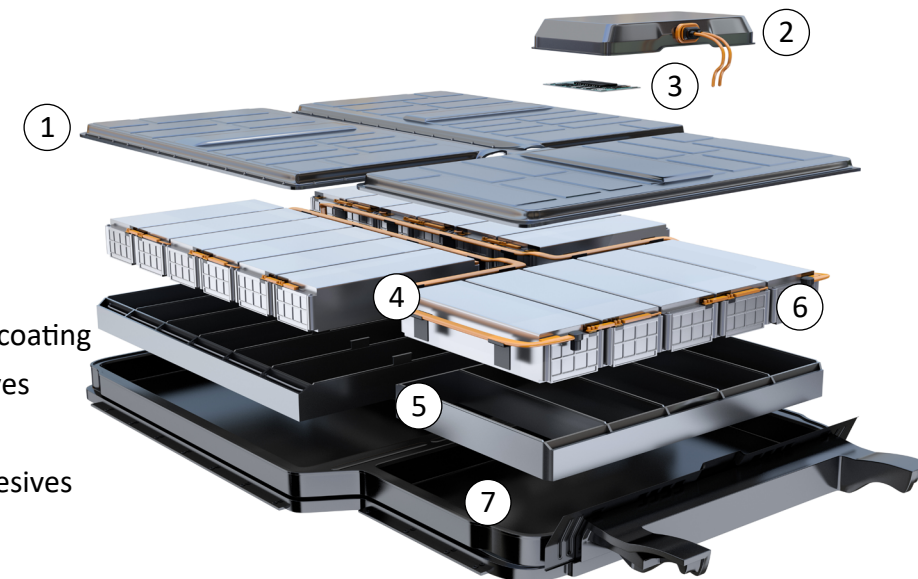


PERMABOND ET5442

Expanding Thermally Conductive Filler

Lightweight Battery Filler

Permabond ET5442 expands during cure to form a lightweight foam surrounded by a highly thermally conductive skin. The fire-retardant, low-density foam filler encapsulates battery cells in EV battery modules providing a thermal bridge for heat transfer to the cooling plate.

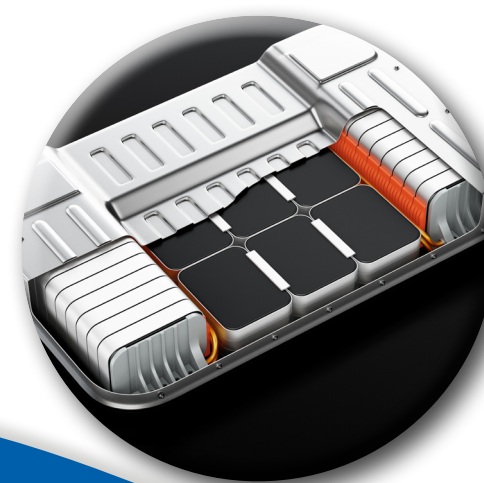

PERMABOND NH100

Non Reactive One Part Sealant

Battery Housing Sealant


Seals Metals and Plastics

Permabond NH100 instantly seals threaded and flanged metal and plastic joints that resist vibration and thermal shock. The non-hardening sealant is easily removed.



Permabond
Engineering Adhesives

Permabond has been trusted for over 60 years in various industries, including the aerospace, automotive, transportation, and recreational vehicle industries. Adhesives are found in virtually every moving machine!

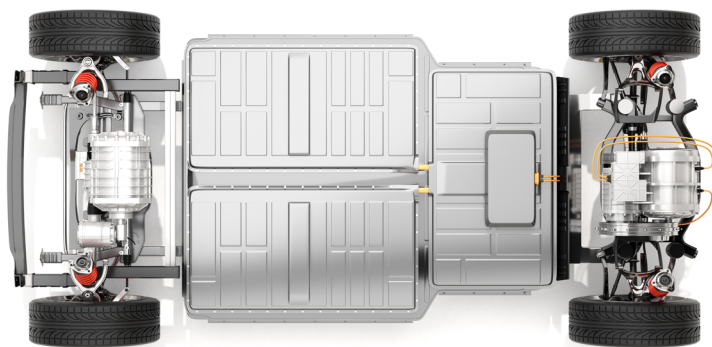

Typical applications of Permabond adhesives include:


- Electric Motor Magnet Bonding
- Threadlocking
- Gasketing
- Retaining
- Bonding Interior Trim
- Camera Lens Bonding

The use of adhesives in electric vehicles is even more widespread than their use in conventional automobiles. Adhesives offer many advantages to both types of vehicles, including; ease of use compared to welding, environmental resistance, sealing, distributing stress, and joining dissimilar materials. The advantages of adhesives specific to electric vehicles include bonding composites and low surface energy plastics, reducing weight, thermal conductivity, and electrical insulation.

Contact Us!

We look forward to assisting you in selecting the best stock or custom engineering grade adhesive for your application! Our team is dedicated to providing high quality products that meet today's challenges for improvements in performance, efficiency, and cost effectiveness.

www.permabond.com

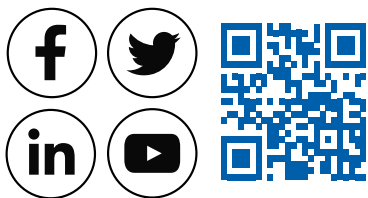

Permabond® Engineering Adhesives
223 Churchill Ave. Somerset, NJ 08873

- **The Americas** - 732-868-1372
info.americas@permabond.com
- **Europe** - 0800 975 9800
info.europe@permabond.com
- **Asia** - + 86 21 5773 4913
info.asia@permabond.com

Non-Warranty: The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case, we urge and recommend that purchasers, before using any product in full scale production, make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose, under their own operating conditions. The products discussed herein are sold without any warranty, expressed or implied. No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission inducement, or recommendations to practice any invention covered by any patent without authority from the owner of the patent. Purchasers of Permabond products are expected to follow the guiding principles of the Chemical Manufacturers Association's Responsible Care® program. Please refer to the technical data sheet for the most up to date information on each product. While every effort has been made to insure the accuracy of the information provided, Permabond cannot be held responsible for typographical errors.